

MotionCam Outdoor (PhOD) Jeweller

Wireless IR motion detector for indoor and outdoor use supporting photo by alarm, photo on demand, photo by schedule, and photo by scenario features



An Ajax hub is required for operation. Find the detailed information on the device by the link:

<http://ajax.systems/support/devices/motioncam-outdoor-phod>




- 2 GRADE EN 50131
- PD 6662 2017
- IP56



Key features

- Up to 15 m detection distance
- Anti-masking system
- Pet immunity
- Temperature compensation
- False alarms prevention algorithm
- A built-in camera for photo verification
- Effortless installation and replacement
- Up to 3 years of operation on pre-installed battery
- Remote control and setup via the app
- Connecting via QR code

Angles and detection range

The detection distance can be adjusted from 3 to 15 meters using the scrollbar on the back panel of the detector. Setting the correct detection range will protect against false alarms.

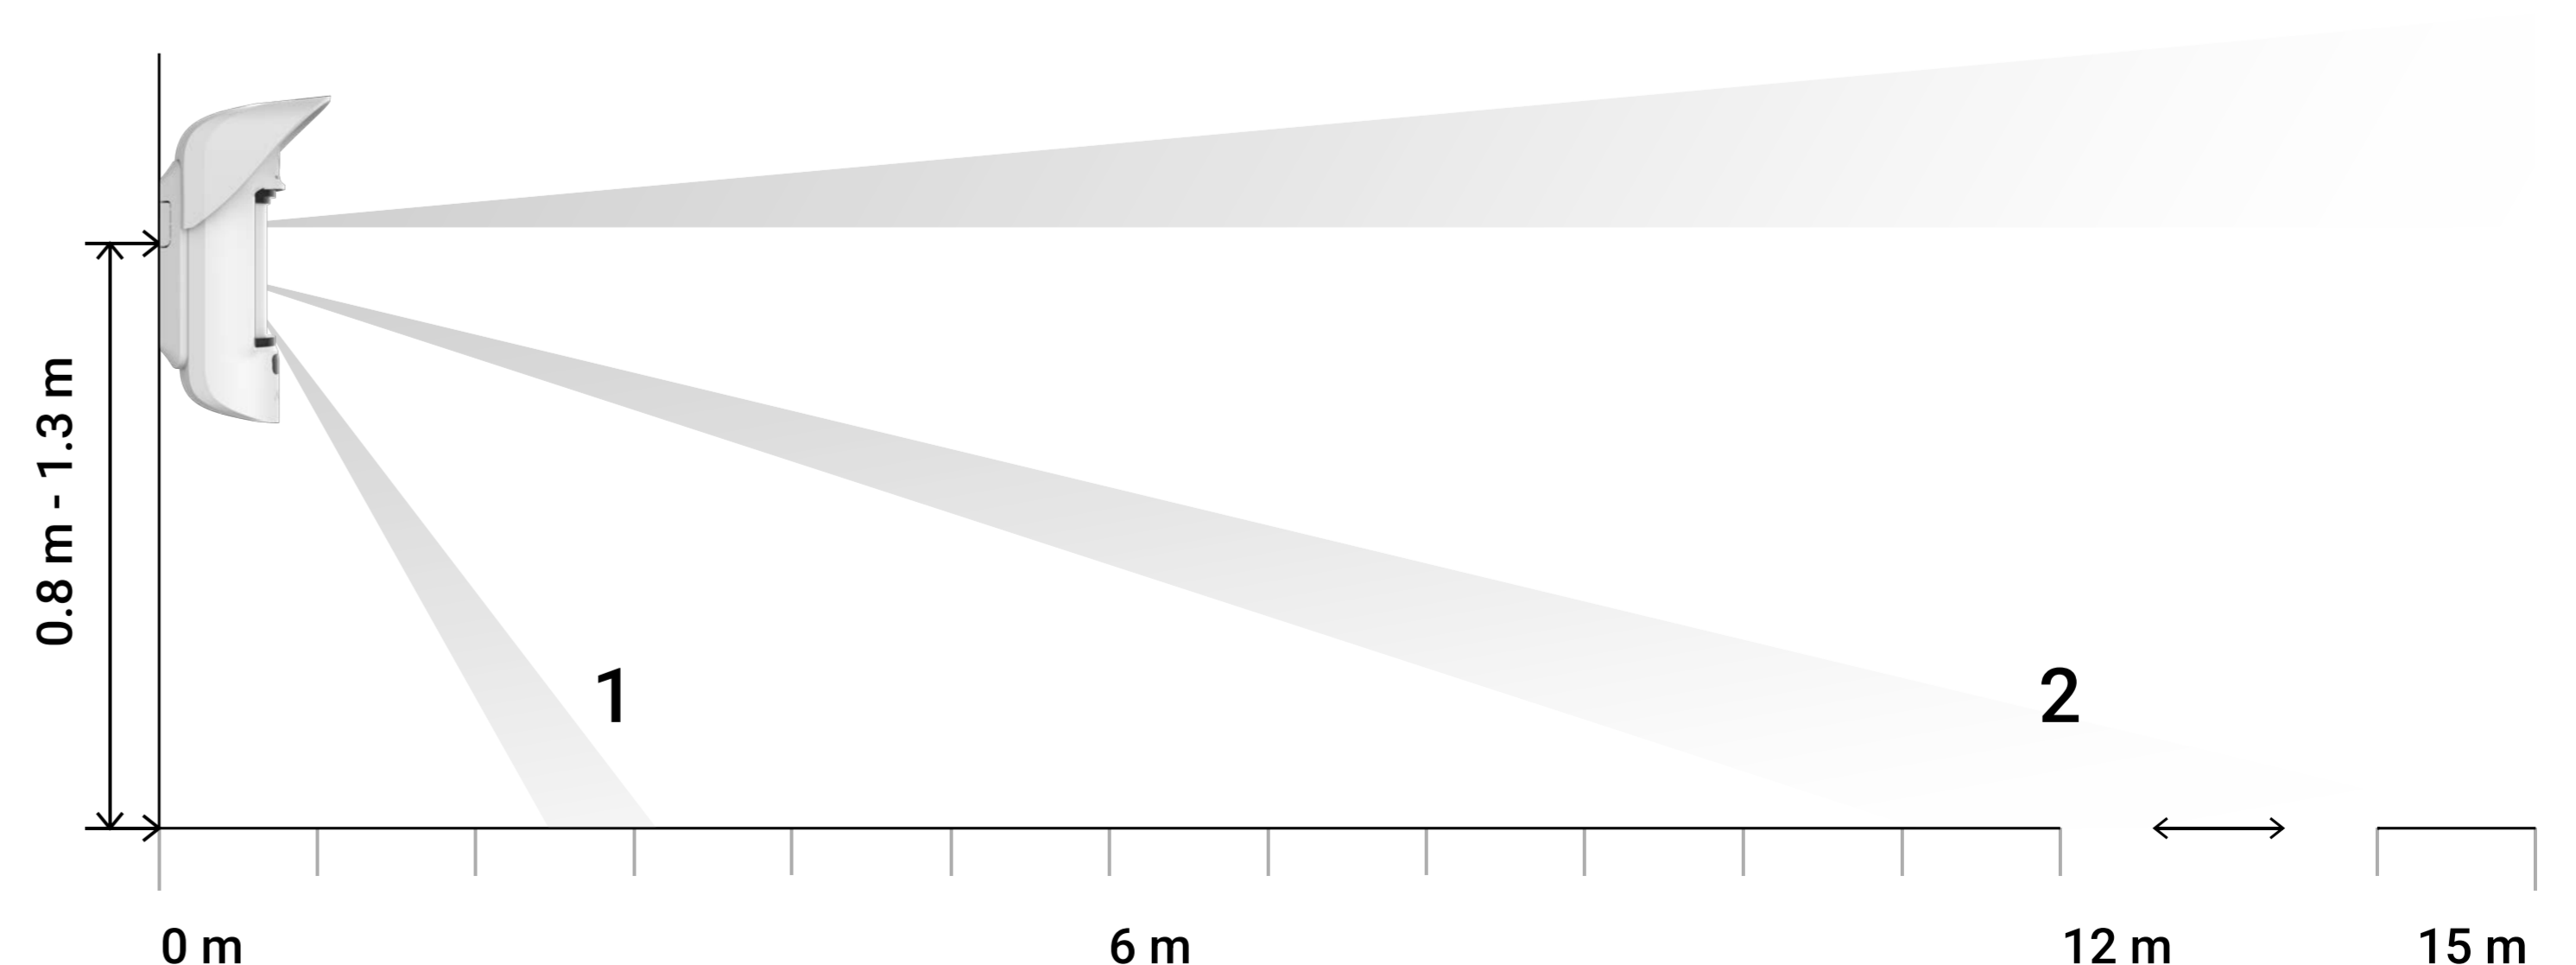

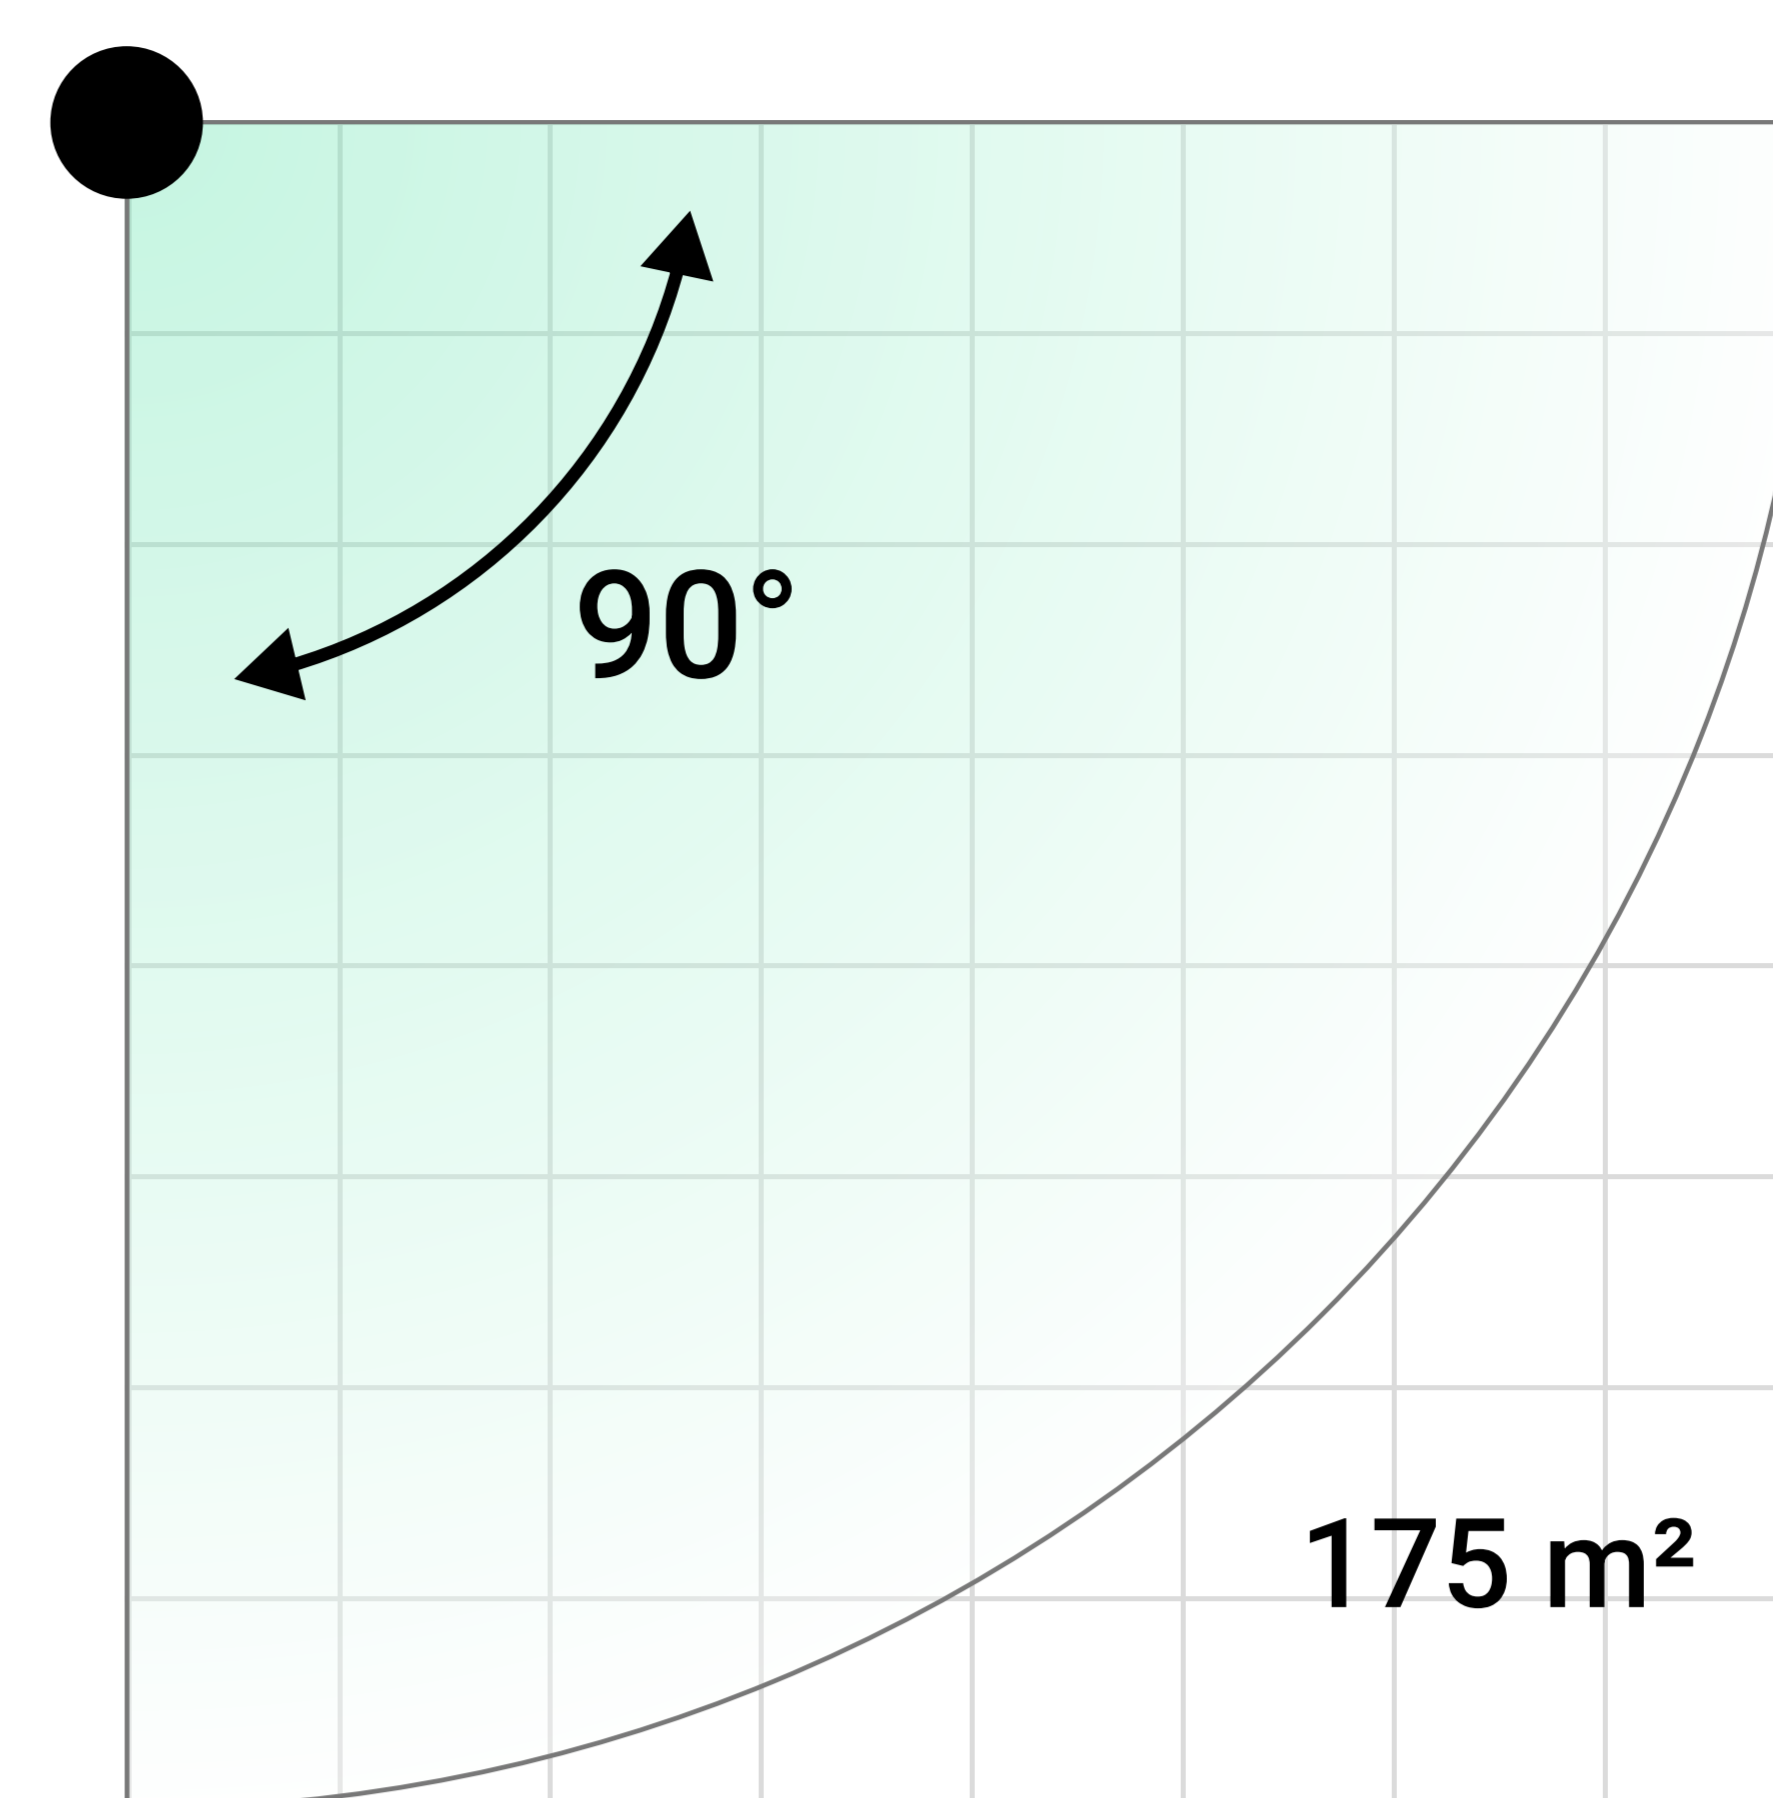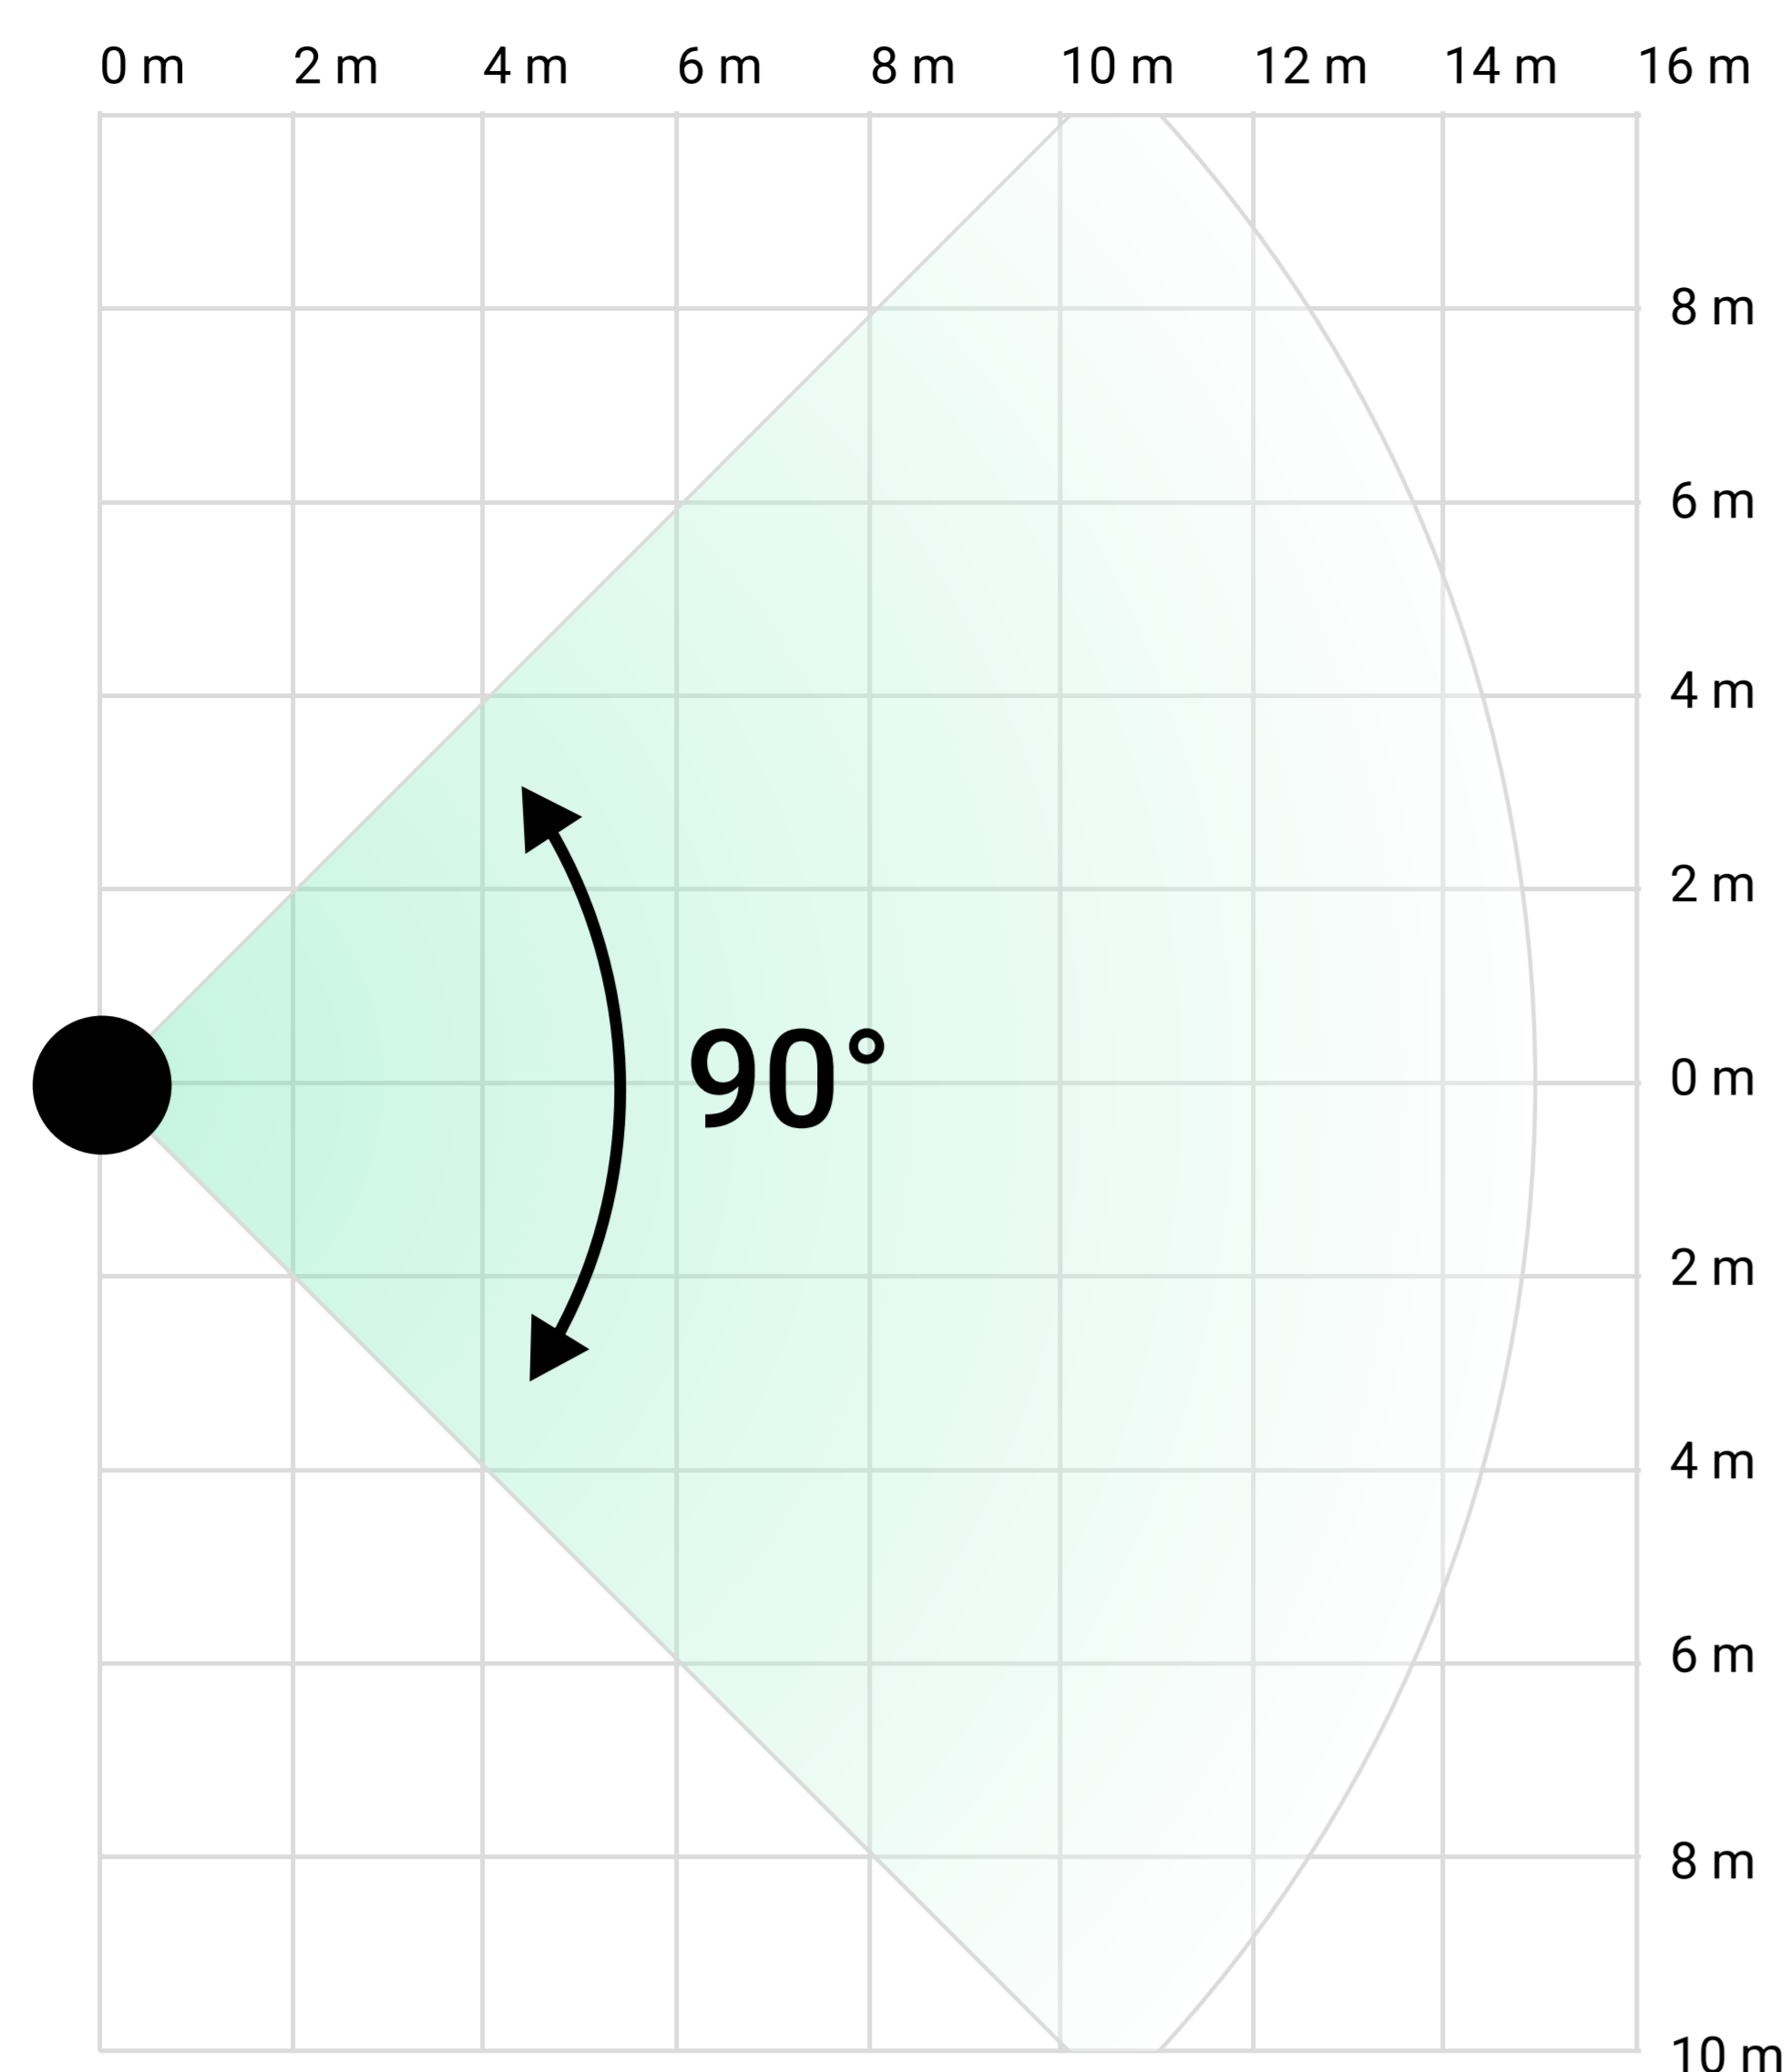

With the 90° horizontal viewing angle, MotionCam Outdoor (PhOD) Jeweller can cover up to 175 m² area.

False alarms prevention

MotionCam Outdoor (PhOD) Jeweller features a system of two independent PIR sensors that collect enough data to analyse the threat's reality with the SmartDetect and LISA software algorithms.

SmartDetect constantly analyses the thermal diagram from the PIR sensors: the intensity of IR radiation, the size of the thermal spots, movement speed, and other parameters. LISA compares the frequency components of sensors signals – it is a technology that guarantees detector accuracy. When the detector is correctly installed and configured, it does not react to common sources of false alarms and pets under 80 cm tall.



Pet immunity



Filtering sun glints and hot air streams

Photo verification

MotionCam Outdoor (PhOD) Jeweller is equipped with a built-in camera to show the real situation at the facility. There are four types of photo verification: by alarm, by scenario, by schedule, and on demand. The user can request and see photos with one click in the Ajax app.

Photo by Alarm

A built-in camera is activated if the detector is armed and motion is detected. Only users with access to the hub event feed and security company employees can view the photos.

Photo by Scenario


A detector camera takes pictures automatically when other Ajax devices are triggered.

Photo on Demand


The user takes pictures at any time or when a detector is armed (depending on settings). Photos on demand are not sent to the security company monitoring station.

Photo by Schedule


The detector automatically takes photos at a specified time.



HDR camera for clear photos



Up to 640 × 352 pixels photo resolution



IR backlight for low light conditions



Up to 5 photos in a series




The MotionCam series includes detectors without **Photo on Demand**, **Photo by Schedule**, and **Photo by Scenario** features. These devices do not have the “PhOD” mark in the product name.

Privacy on demand

Users can manage access rights to detectors with photo verification. The access level can be defined for each system user. Privacy settings determine:

- Which user can take and view photos on demand.
- Which detectors with photo verification can be used to take photos on demand.
- When the user can take photos on demand: at any moment or only when a detector is armed.

By default, all hub admins have the right to manage privacy settings. PRO users cannot manage privacy settings.

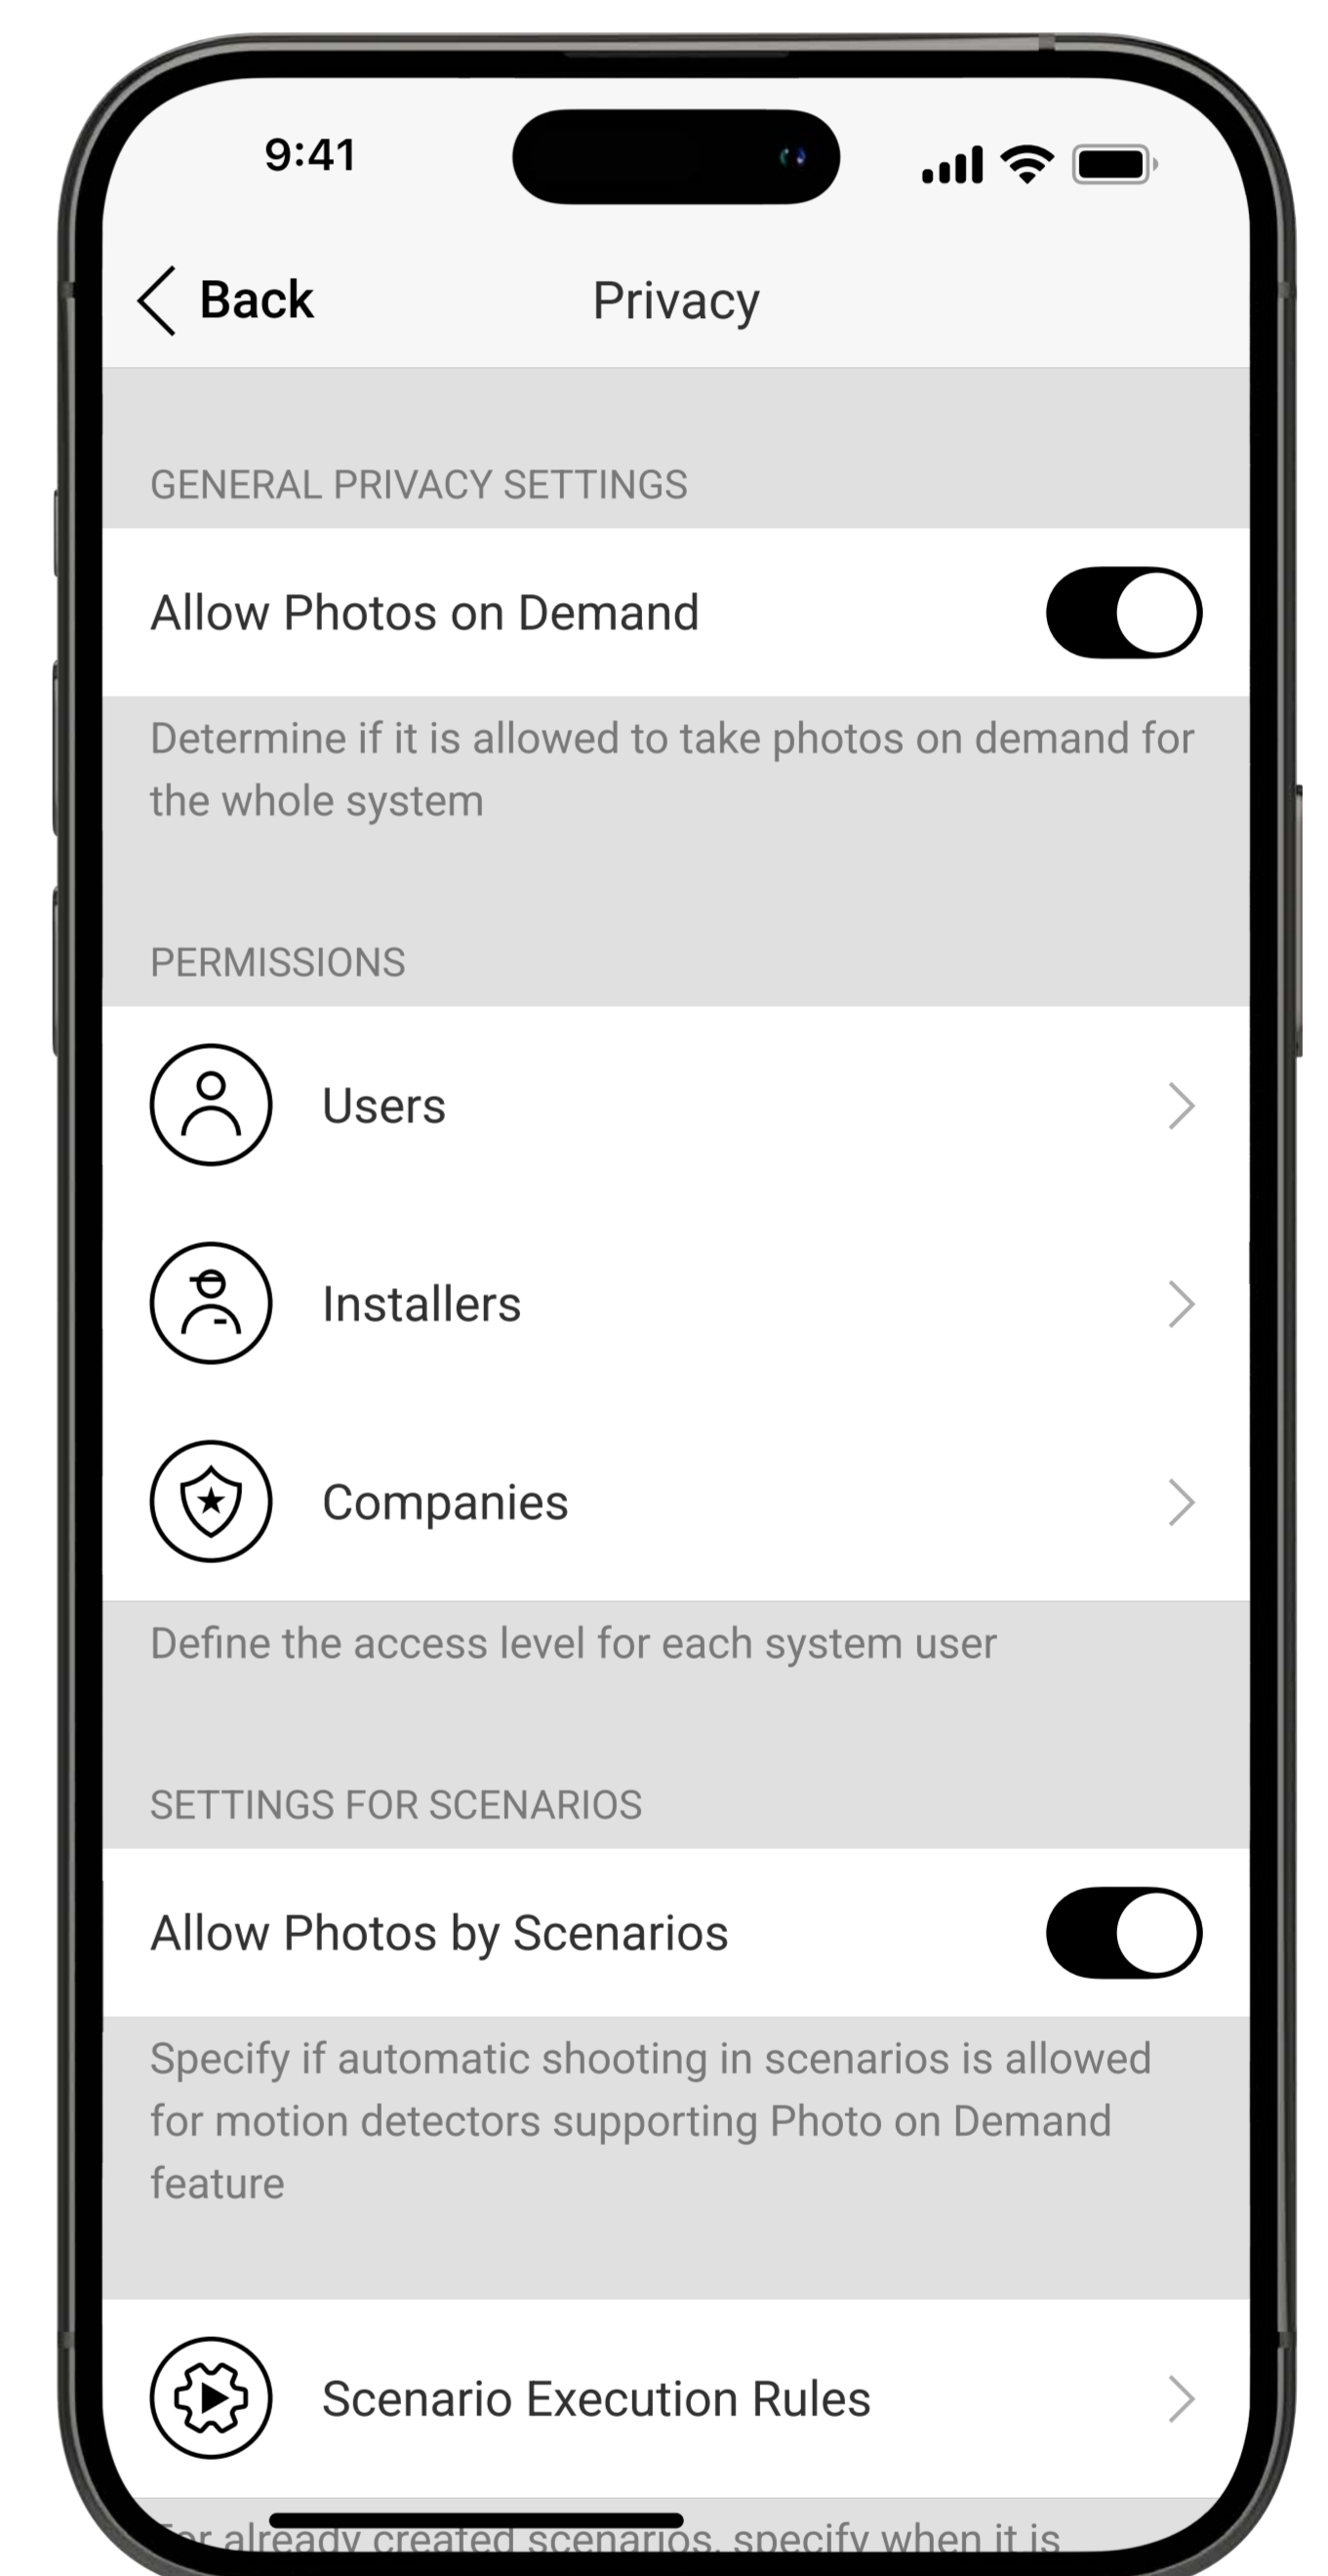

Photos are encrypted throughout the transmission and storage processes



Photos are available only for users with proper access rights

Monitoring software that supports Ajax photo verification



Horus




Manitou



SBN



Sentinel

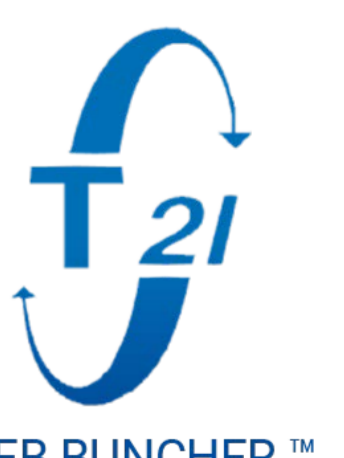

WBB

See the full list by the link: ajax.systems/connecting-to-cms/

Weatherproof design


MotionCam Outdoor (PhOD) Jeweller is ready to operate in various climate zones. The detector is protected from dust and splashes and features a temperature compensation technology, making it effective in any weather conditions. The bundled hood protects masking sensors from rain and snow.



IP56 enclosure




-25 °C to +60 °C temperature range




Hood in the set

Antisabotage protection


The anti-masking system calibrates automatically when mounting the device onto SmartBracket. Then, if an obstacle appears in the field of view of anti-masking sensors or if they are painted, the detector notifies users and a security company. A tamper is immediately activated when the detector is dismantled from the bracket. The system needs less than a minute to identify communication loss with the detector.



Grade 2 anti-masking



Tampering alarm




Polling period from 12 s

Two-way encrypted communication



Jeweller




Wings

communication technology



Jeweller and **Wings** are two-way **wireless data transfer protocols** that provide fast and reliable communication between hubs and devices. Radio protocols work independently of each other and focus on their own function. The **Jeweller** protocol delivers instant data-rich alarms: security companies and users know which device was triggered, when and where it happened. The **Wings** protocol delivers photos taken by a detector built-in camera.

Both protocols feature **encryption** and **authentication** to prevent forgery, and **polling** to display devices' status in real time. Supporting **up to 1,700 m** of wireless connectivity, Jeweller and Wings are ready to protect facilities and deliver **the best user experience** for both end users and installers.



Up to 1,700 m of two-way encrypted wireless communication between hub and detector



Alarm delivery in 0.15 s,
the first photo – less than in 9 s

Hassle-free installation

To add a detector to the system, the installer scans the QR code with the Ajax app and assigns a name and a room. Configuring is done in the app in real-time using detection zone and signal strength tests. The detector can be disabled or its system parameters can be reconfigured remotely.



Technical specifications

<p>Compliance with standards</p> <p>EN 50131 (Grade 2) PD 6662:2017¹</p>	<p>Compatibility</p> <p>Hubs Hub 2 Hub 2 Plus Hub Hybrid (2G) Hub Hybrid (4G)</p> <p>Range extenders ReX 2</p>
<p>Communication channels with Ajax devices</p> <p> Jeweller communication technology</p> <p> Wings communication technology</p> <p>Frequency bands 866,0 – 866,5 МГц 868,0 – 868,6 МГц 868,7 – 869,2 МГц 905,0 – 926,5 МГц 915,85 – 926,5 МГц 921,0 – 922,0 МГц Depends on the region of sale</p> <p>Maximum effective radiated power (ERP) ≤ 20 mW</p>	<p>Motion detection</p> <p>Sensitive element 2 × PIR sensor</p> <p>Detection distance up to 15 m When installed at a height of 0.8–1.3 m from the ground level</p> <p>Detection angles horizontal – 90° vertical – N/A</p> <p>Motion detection speed from 0.3 to 2.0 m/s The direction of the detector lens should be perpendicular to an alleged intrusion path into the facility</p>

<p>Communication channels with Ajax devices</p>	<p>Communication range up to 1,700 m In an open space</p> <p>Polling interval 12–300 s Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Protection against spoofing Device authentication</p>	<p>Motion detection</p>	<p>Temperature compensation</p> <p>Sensitivity 3 levels Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Pet immunity height: up to 80 cm weight: N/A</p>
<p>Photo verification</p>	<p>Photo resolution in pixels 640 × 352 320 × 176 (default) Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Photos in a series from 1 to 5 pics Adjusted by PRO or user with admin rights in the Ajax app</p> <p>IR backlight</p>	<p>Power supply</p>	<p>Battery 4 x CR123A Pre-installed</p> <p>Battery life up to 3 years</p>
<p>Enclosure</p>	<p>Color white</p> <p>Dimensions 206 × 108 × 93 mm</p> <p>Weight 470 g</p> <p>Tampering alarm</p>	<p>Installation</p>	<p>Recommended installation height 0.8–1.3 m from the ground level</p> <p>Operating temperature range from -25 °C to +60 °C</p> <p>Operating humidity up to 95%</p> <p>Protection class IP56</p>

Complete set	MotionCam Outdoor (PhOD) Jeweller 4 × CR123A battery (pre-installed) SmartBracket mounting panel Hood Installation kit Quick start guide
--------------	--

¹ When installed indoors.