

# SC-41-0200-0001-99

## SmartCell Dual Input/Output Device for Fire Zones


### Overview

---

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

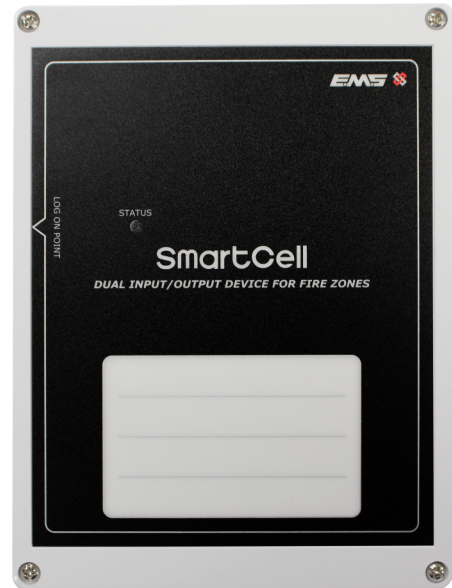

### Details

---

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

# SC-41-0200-0001-99

## SmartCell Dual Input/Output Device for Fire Zones

### Technical specifications

---

#### General

---

Wireless frequency 868 MHz

---

#### Input

---

Input quantity 2

---

Input type and rating Resistor monitored inputs

---

#### Output

---

Output quantity 2

---

Output type and rating Voltage free outputs, rated 1 A at 30 VDC

---

#### Physical

---

Physical dimensions 150 x 200 x 55 mm (W x H x D)

---

Net weight 0.45 kg

---

Mounting type Wall mount

---

Batteries 3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)

---

#### Environmental

---

Operating temperature -10 to +55°C

---

Storage temperature -10 to +30°C (with batteries)  
-10 to +55°C (without batteries)

---

Relative humidity 95% noncondensing max.

---

Environment Indoor

---

#### Regulatory

---

Compliance CE

---

Certification CPR

---

Standards EN54-13  
EN54-18  
EN54-25

---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [uk.firesecurityproducts.com](http://uk.firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 10:31