# DP3 Grade 3
## Double Push Hold Up Device

**CQR FIRE & SECURITY**
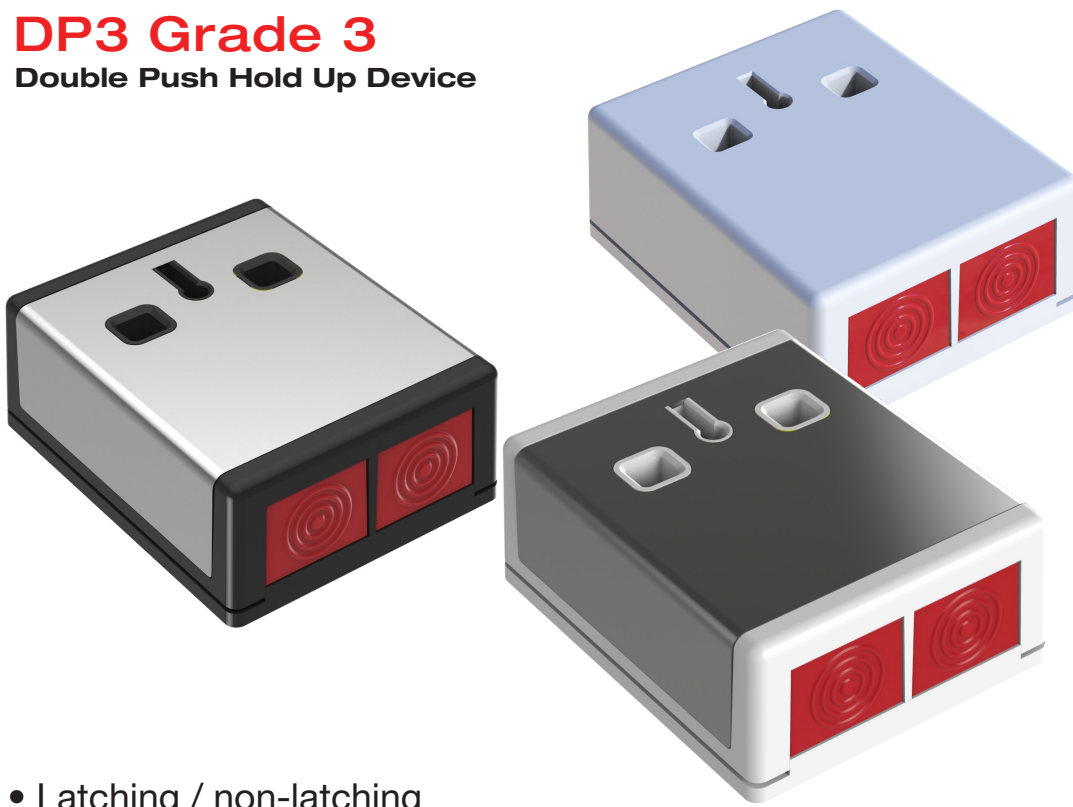
- Latching / non-latching
  - Selectable for Normally Open / Normally Closed
  - Indicator to show activation
    - Microswitch Alarm and Tamper
      - Selectable End of Line Resistors
        - Key Resettable
          - Spare keys available

## Specifications

| PADP3 | |
|---|---|
| Case Material | ABS or ABS /304 Grade Stainless Steel |
| Buttons | Acetal |
| Reset Key | Steel |
| Dimensions mm | 75mm x 62mm x 29.5mm |
| Operation | 2 button, latching / no latching |
| Reset Method | Key |
| Switch Rating | 3A 50Vdc changeover |
| Anti Tamper | Normally closed tactile 24v DC at 1A max |
| Standards | EN50131-1:2006 + A1:2009 Grade 3 |
| Environmental Class | II |

| Product Codes | |
|---|---|
| PADP3/SS/* | ABS with Stainless steel wrap round cover |
| PADP3/* | White ABS only |
| MOUKEY | Replacement black plastic key |
| KEYPAM | Replacement metal key |
| | * indicates colour |

Manufacturing security components and cable in the UK for over 35 years

35 Years

SGS  UKAS QUALITY MANAGEMENT 005

BSIA THE BRITISH SECURITY INDUSTRY ASSOCIATION

OSI GROUP OF COMPANIES

FIA Fire Industry Association