



# Call Latch Module


Part No. **NC889**



T 01942 322744    E sales@c-tec.co.uk  
F 01942 829867    W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom

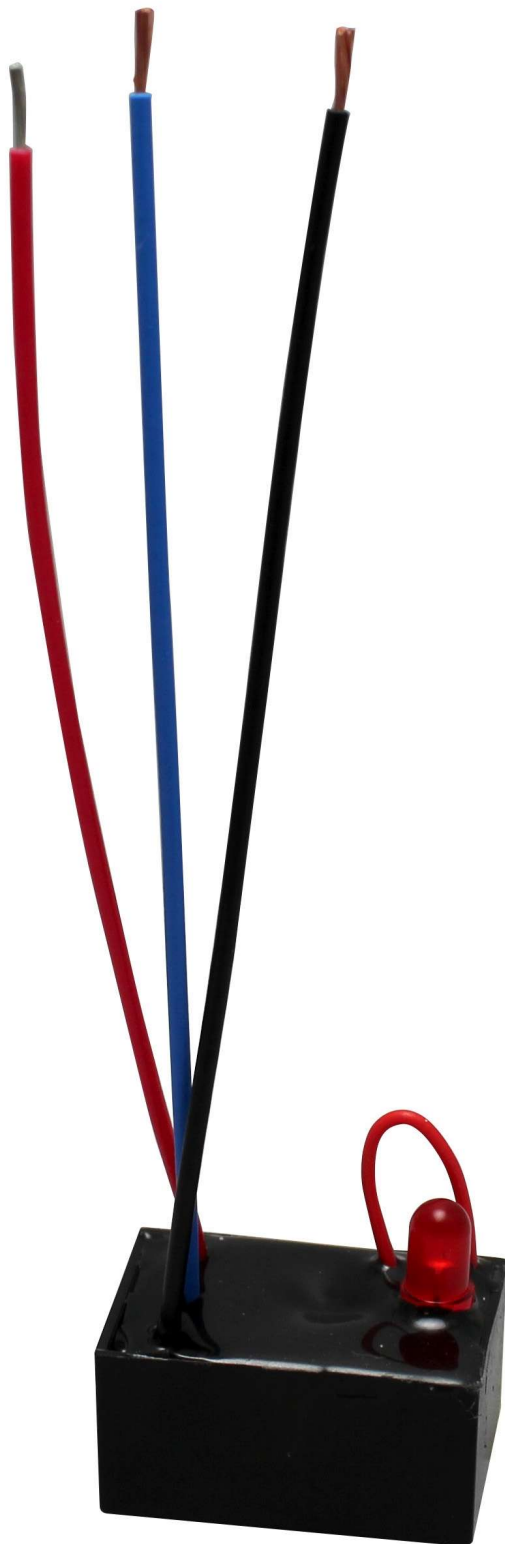



## Overview

- A discreet monitoring module that allows any device with a normally open or normally closed switch to generate a Standard call on an 800 Series Call System.
- Measures just 25 x 20 x 15mm - ideal for locating inside or alongside the monitored device.
- Red reassurance LED illuminates when a call is made.
- Can be connected to panic buttons, door bells, radio receiver transmitter pairs, ultra-sonic receiver transmitter pairs, etc.
- Requires a separate reset point.
- Mounts using a self-adhesive pad (supplied).



## More Information

## Technical Specifications

Quiescent current	0mA (none).
Alarm current	Determined by the type of control equipment and number / type of field devices connected to the system.
Indicators	Red Reassurance LED (lit constant for Standard calls).
Controls	Link wire - keep intact for normally closed operation; cut for normally open operation.
Connections	Black -Ve wire; Red Signal wire; Blue Trigger wire.
Onboard 6.35mm Remote Jack Socket	No.
Onboard Infrared Receiver	No.
Product dimensions (mm)	30 W x 25 H x 20 D mm. Approximate length of each flying lead is 102mm.
Construction & finish	Plastic.
IP Rating	IP41.
Weight	12g
Operating conditions/temperature	-5°C to +40°C. Max. relative humidity 95% non-condensing.
Notes	Requires a separate reset facility.



T 01942 322744 E sales@c-tec.co.uk  
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom