Wireless intruder alarm panel

The i-on Compact is a fully featured wireless security panel that brings next-generation cloud capabilities to residential and small commercial properties. The wireless intruder panel, with built-in keypad, offers up to 20 radio zones and can be programmed, managed and serviced remotely by installers via Eaton SecureConnectTM.



Built with cyber security in its DNA the i-on Compact is Eaton SecureConnect™ Cloud and App enabled

Multiple communication options

Built-in Ethernet port and optional PSTN or GSM allow you to tailor installations to the properties' needs.

Eaton SecureConnect™ Cloud and App

Control and monitor your panel through the cloud 24/7 anytime anywhere across multiple locations. Provide your customers with a secure App for convenient control of their system ensuring peace of mind.

Simple visual verification

Connect Eaton security cameras to the i-on Compact panel to provide an additional layer of security.
Capturing images locally on an SD card and view through App or email




At a glance...

- 20 radio zones
- Built in communications (SIA IP ARC) as standard
- End User App for Arm/Disarm & push notifications of events
- Built in Ethernet port with web server and virtual keypad
- · Visual verification
- · Perimeter zone functionality
- Radio Arming Station (KEY-RAS)
- Plug on ARC/Speech/SMS for PSTN/GSM
- Plug on 4G module for cloud connectivity
- Class leading Scantronic radio
- Email notifications
- EN50131 Grade 2 PD6662:2017 Grade 2

Scantronic product data sheet

Product specification

Product code	COMPACT / COMPACT-EU Also available as kits
Compliance	EN50131-1:2006 + A1:2009 Grade 2 and environmental class II, EN50131-3:2009, EN50131-6:2008, BS8243:2010, PD6662:2017
Zones on board	20 radio zones
Event log	250 mandatory event logs and 50 non mandatory events
Number of users	20 users
Number of outputs	20 radio outputs
Number of part sets	1 full set and 3 part sets
Power supply	500mA switch mode
Battery (maximum capacity)	COMPACT-BAT01: 6 x NimH cell battery pack
Temperature range	Environmental class II. Tested -10°C to 55°C @ 93% RH
Weight	710g (with battery)
Dimensions	238mm (h) x 161mm (w) x 38mm (d)

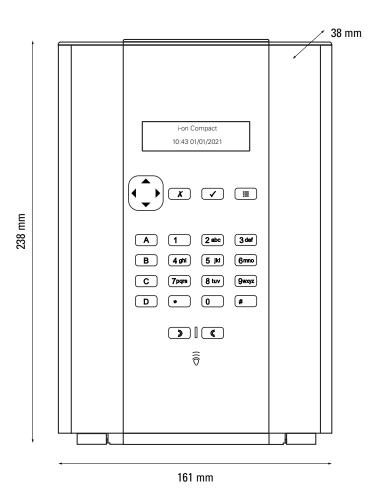

Compare product compatibility with our easy to read chart: www.eaton.com/security-works-with

