

Wireless keypad for non-bus panels



The KEY-RAS is designed to work with the i-on range control panels. The keypad allows users to set and unset the system. The KEY-RAS, in two-way mode, will also provide entry, exit and alarm tones.

At a glance...

- Four LEDs show the setting status of partitions or levels
- "A, B, C, D and Unset" keys provide quick setting and unsetting of the system
- A built in proximity tag detector
- Built in panic button enabled in programming
- Option of two-way mode, which works with SecureConnect enabled panels to provide audible feedback on setting and unsetting
- One-way mode for use with older i-on panels and expandable panels. This provides an arming station to set or unset
- Option of battery or external 12V power supply




Powering Business Worldwide

Scantronic product data sheet

Product specification

| | |
|----------------------------|----------------------------------|
| Product Code | KEY-RAS |
| Radio frequency | 868 MHz |
| Transmission range (m) | 300m in free space |
| EN 50131 grade | 2 |
| Environmental class | Class II |
| Security grade | 2 |
| Operating temperature (°C) | -10 to +55°C |
| Colour (LOV) | White |
| Battery quantity | 3 AA Alkaline batteries |
| Dimensions | 128mm (h) x 128mm (w) x 35mm (d) |

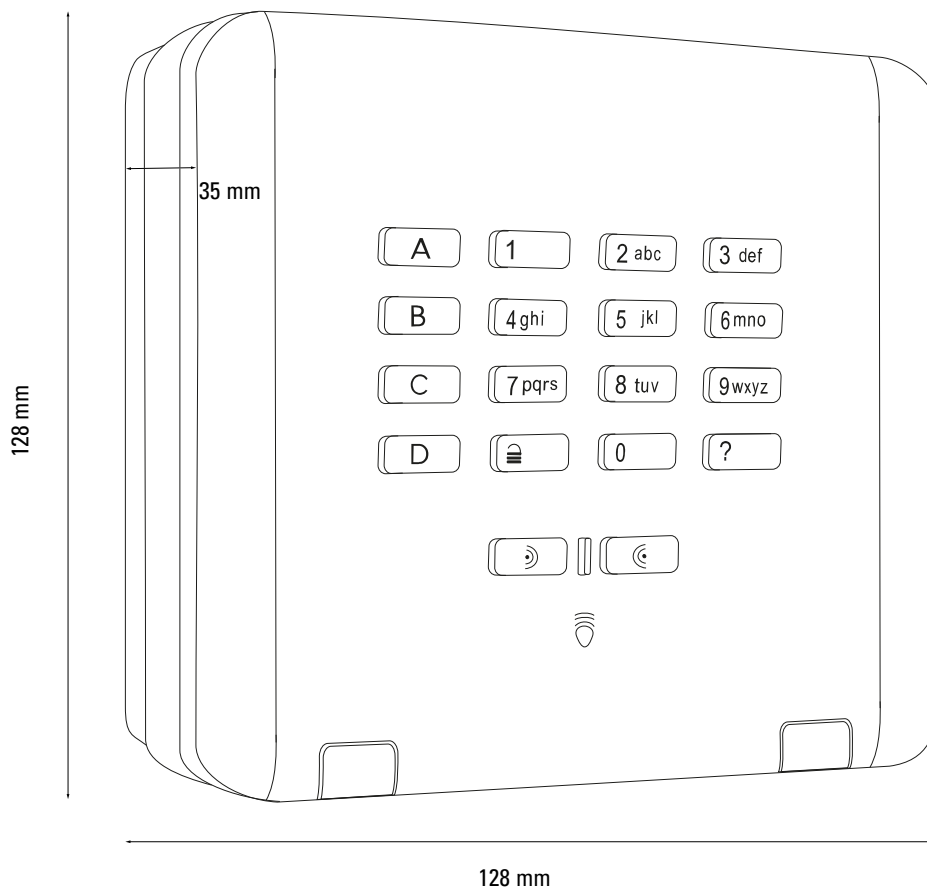

Compare product compatibility with our easy to read chart: www.eaton.com/security-works-with