

Indoor Specialist Activation Devices Rockerswitch model 9200



> Product Benefits

- Variety of rockerswitch devices available
- Suitable for Fire, Security & Other Specialist Applications
- Variety of colours and markings



Product Overview


The KAC Class 9000 range of devices provides you with the most comprehensive range of switching product solutions for fire, security and other specialist applications.

All products comprise a main housing and escutcheon plate. The switching device is fitted to the plate, which simply snaps into the main housing and is permanently located into place by fixing screws.

As with our market leading range of call points, all switching devices can be supplied in our core colours of red, green, white, yellow and blue. There are also numerous function marking options available to meet your specific requirements.

The rockerswitch family forms part of the Class 9000 range and can be supplied in three principle versions: -

- Two positions (marked '1' and '0'), with double pole contacts (see figure 1 for contact arrangement).
- Double pole ON/OFF switch with red 220VAC neon indicator connected across output terminals (see figure 1 for contact arrangement).
- Three positions (marked '0', '1' and '2' with two sets of three contacts. No inter-contact in centre '0' position, alternate connections made in positions '1' and '2' (see figure 2 for contact arrangement).




KAC

ROC-1
Rev. No. 4

Electrical Specification


Connection Details:	See figures 1 & 2
Cable Terminals:	See figure 3
Maximum Voltage:	240VAC or 24VDC
Current Rating:	2 Amps @ 240VAC, 6 Amps @ 24VDC

Fig.1

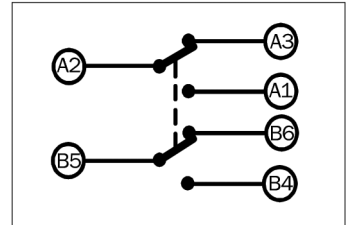


Contact arrangement on Type 9201

Fig. 2

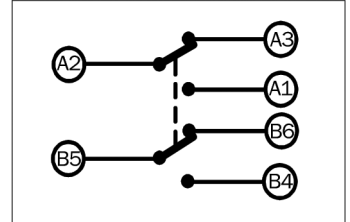

Contact arrangement on Type 9202

Fig. 3

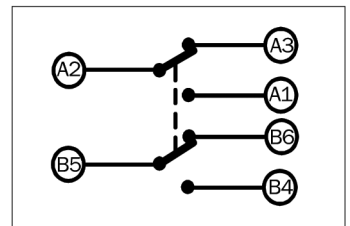

Contact arrangement on Type 9203

Environmental Specification

Humidity:	0-95% non-condensing
Operating Temperature:	-20°C to +70°C
Storage Temperature:	-20°C to +70°C
Ingress Protection (IP) Rating:	IP24D
For RoHS, WEEE & REACH data please see www.kac.co.uk	

Mechanical Specification


Material:	ABS
Weight:	120g Flush, 180g Surface
Colour:	Red, Green, White, Yellow, Blue, Orange

Fig. 4



Rear view, showing the screw/clamp terminals to which the installer directly connects the installation wiring

Dimensioned side view of Rockerswitch Model



Ordering Information

Model	Description	Mounting
W*9201	Double pole changeover	Flush
W*9202	Double pole single throw, red neon indicator	Flush
W*9203	Double pole changeover with centre off	Flush

* - defines colour, R=red, G=green, W=white, Y=yellow, B=blue, A=orange

Other variations are available.

To identify the function label please attach word to the end of the above part codes.

For example WR9203/SR-F222 = Three position rockerswitch, red, "House Flame" label

For available function labels please refer to our data sheets "FM-RED" and "FM-COL".

Accessories

Code	Description
PS200	Plain Hinged Cover

> KAC Alarm Company Ltd

KAC House, Thornhill Road,
North Moons Moat, Redditch,
B98 9ND, United Kingdom
Tel: +44 (0) 1527 406655
Fax: +44 (0) 1527 406677
e-mail: marketing@kac.co.uk

KAC