

## TECHNICAL DATASHEET

### Part Numbers and Product Order Codes:-


<b>Part Number</b>	- - - - -	EV-MCP RESET
<b>Description</b>	- - - - -	Analogue Evolution Type A Indoor Manual Call Point
<b>Computer Reference Number</b>	- - - - -	F16N82003 – Surface Mount F16N82008 – Flush Mount

### Technical Specifications:-

<b>Operation Method</b>	- - - - -	Non Frangible, Resettable
<b>Operating Element</b>	- - - - -	Microswitch
<b>Operating Voltage</b>	- - - - -	20V d.c. to 35V d.c.
<b>System Voltage</b>	- - - - -	35V d.c.
<b>Quiescent Current</b>	- - - - -	200µA
<b>Alarm Current</b>	- - - - -	2mA (LED ON)
<b>Operating Temperature</b>	- - - - -	- 10°C to + 55°C
<b>Storage Temperature</b>	- - - - -	- 25°C to + 70°C
<b>Charging Time</b>	- - - - -	1 minutes
<b>Relative Humidity</b>	- - - - -	≤ RH95% non-condensing.
<b>I.P. Protection Rating</b>	- - - - -	IP24
<b>Addressing Method</b>	- - - - -	8 Way DIL switch.
<b>Material</b>	- - - - -	POM / Polycarbonate
<b>Dimensions</b>	- - - - -	87mm x 87mm x 23mm
<b>Mass</b>	- - - - -	115gms
<b>Connections</b>	- - - - -	Flying Leads
<b>EMC Conformance</b>	- - - - -	EMC conformance to BSEN50130-4
<b>CE Conformity</b>	- - - - -	EN54-11:2001/A1:2005
<b>CPD Number</b>	- - - - -	2531-CPD-232.1690
<b>DoP Number</b>	- - - - -	1690

All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1  
All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

### Dimensions

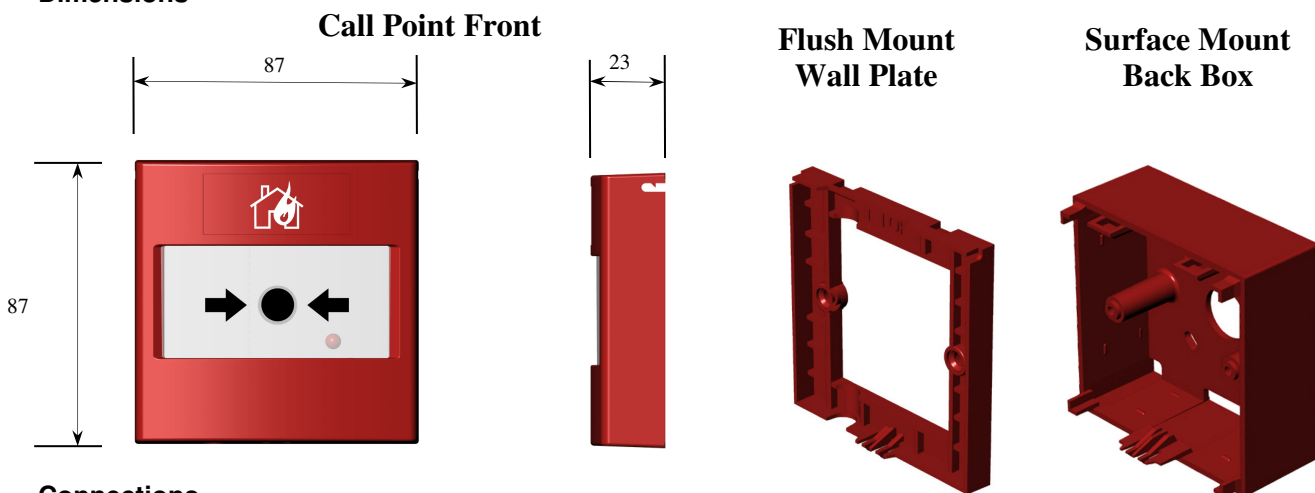

### Connections

